


LZM-G Tube Flow Meters

Models: LZM-xxG
Material:
Body: Acrylic
Float & Rod: Stainless Steel
Adapter: PP
Accuracy: ± 4 %
Temperature: ≤ 60°C
Pressure: ≤ 10 Bar (1 MPA)



LZM-15 -25G LZM-50G LZM-40G LZM-75GF

| Model | Measuring Range | | Dimensions (mm) | | | Adapter Type |
|---------|-----------------|---------|-----------------|-----|----|------------------------------|
| | GPM | LPM | A | B | C | |
| LZM-15G | 0.1-1 | 0.5-4 | 210 | 180 | 32 | 1/2" BSP Female |
| | 0.2-2 | 1-7 | | | | |
| | 0.5-5 | 1.8-18 | | | | |
| LZM-20G | 1-10 | 4-36 | 265 | 235 | 45 | 3/4" BSP Female |
| LZM-25G | 2-20 | 10-70 | 306 | 235 | 51 | 1" BSP Female |
| | 5-30 | 20-100 | | | | |
| LZM-40G | 20-60 | 80-220 | 306 | 235 | 51 | 1.5" BSP Male |
| LZM-50G | 20-80 | 80-300 | 380 | 270 | 75 | 2" BSP Male 2" BSP Female |
| | 20-100 | 80-360 | | | | |
| | 40-120 | 150-450 | | | | |
| | 50-150 | 190-560 | | | | |

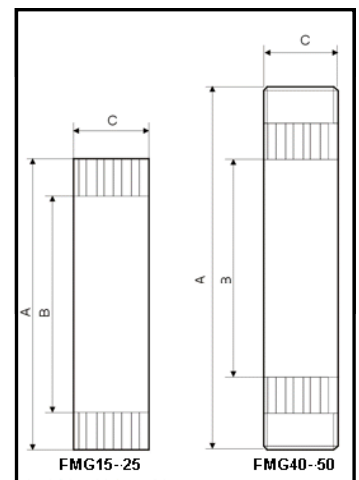

Selection Guide

| Model | Measurement Range | Adapter | O-Ring |
|------------------|----------------------|--|--------------|
| LZM-15G | LM4: 0.5 - 4 lpm | A = ABS P = Polypropylene PV = PVC B = Brass S = Stainless Steel | S = Silicone |
| LZM-50G | GM150 : 50 - 150 GPM | | |
| LZM15- LZM50- | LM4 - GM150 - | A - S - | S S |